



FF600 FIRST FLUSH DIVERSION SYSTEM

The Fox FF600 is a Demand Driven Diversion System for an unroofed wash bay that provides additional stormwater protection by capturing the "First Flush" of rain from the wash area when it starts to rain.

As per all the Fox Diversion Systems it is hydraulically actuated from the wash point in the wash bay, opening automatically and diverting all dirty wash water to the underground holding tank for treatment by an Oil Separator.


At the commencement of rain the FF600 automatically diverts the contaminated "first flush" of rain to the underground dirty water holding tank. After diverting the First Flush of rain to treatment the FF600 automatically locks the diversion valve closed sending all rain water to the stormwater course.

The FF600 Diversion System is designed for larger wash pads for washing Trucks, Earthmoving Machinery, Boats, Aircraft, Shipping Containers etc.

APPLICATIONS

- Aviation/Airports
- Earthmoving
- Armed Forces
- Ports
- Marinas
- Fuel/Gas Stations
- Mining
- Slipways
- Trucking/Transport
- Vehicle Dealerships


MODEL FF600

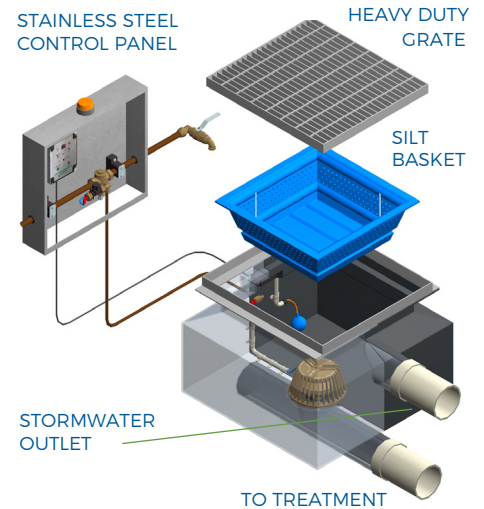

FOX DEMAND VALVE DMV25



FOX DIVERSION VALVE DV150

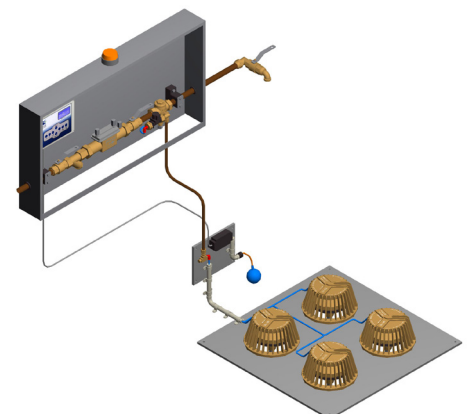

Fox First Flush Diversions System, for all unroofed washdown areas